




**PRODUCT DESCRIPTION**

Naturelite CARE PLUS WP crack fill is a completely eco-friendly low VOC fiber reinforced ready to use crack filling paste for interior and exterior surfaces. It ensures crack bridging ability for plaster cracks up to 5 mm. Its advanced technology elastic film accommodates movement of surface and provides crack bridging membrane with superior mechanical strength and excellent adhesion. Water resistant film of WP crack fill builds a barrier against ingress of water through cracks and thus provides water proofing.

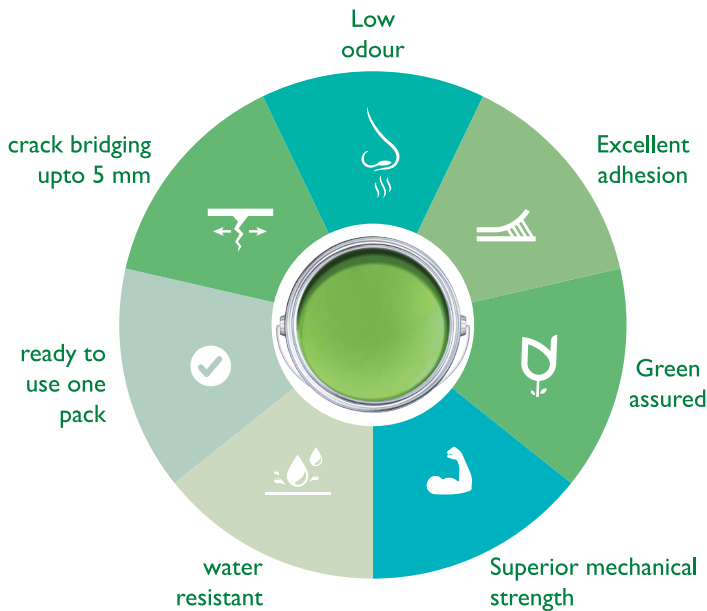

**GREEN ADVANTAGES**

Low odour

Low VOC

APEO free

Phthalate free

No added Mercury

No added Ammonia

No added Lead

No added Arsenic

No added chromium

No added Cadmium

**RECOMMENDED USAGE:**

Naturelite care plus WP crack fill is recommended for cracks and gaps on all exterior and interior absorbent surfaces.

**PHYSICAL PARAMETERS:**

Colour	:	White
Coverage/ spread rate	:	90.36 linear ft. /kg for two coats (Cracks of 3 mm width and 5mm depth)



## DRYING TIME

Surface dry : 45 minutes

Full dry : 6 hours

Recoat interval : 12 hours

The above results according to ASTM D 5895@ 25°C

Stability of thinned paint : use within 24 hours



## SHELF LIFE

36 months from the date of manufacturing, if it is stored under proper conditions and in its original container.

## Surface Preparation & Application Details

Surface preparation:

Ensure the substrate is clean and free from oil, grease or any other loosely held particles. Widen the cracks to form a 'V' shaped groove and clean the area.

Priming:

After cleaning apply one coat of naturelite EC interior exterior primer in the opened cracks.

## Application

Apply a layer of naturelite care plus WP crack fill at least 3 cm on either side of the crack. Press the paste firmly into the crack with a spatula or a putty knife and level with the surface. These must be applied in consecutive perpendicular layers. Allow it to dry for 12 hours before applying second coat. Further finishing of wall can be done only after the crack fill is fully dry.

## Special Instructions

- Not recommended for cracks of more than 5 mm width.
- Do not apply at temperature below 5°C or on wet surfaces.

## PACK SIZES:

0.500kg	1.000kg	5.000kg

## SAFETY PRECAUTIONS:

During application of paint, contact of liquid paint with eyes, skin, inhalation of paint mist and paint vapour, should be strongly avoided. Keep away from reach of children. It is recommended to wear mask during sanding and surface preparation to avoid dust inhalation.

