




PRODUCT DESCRIPTION

A specially formulated elastomeric waterproofing coating designed for below-ground applications. It protects foundation walls and surrounding areas from water intrusion, helping prevent structural damage caused by seepage and moisture. Engineered for longterm durability, it forms a resilient barrier that safeguards the foundation from environmental stress.

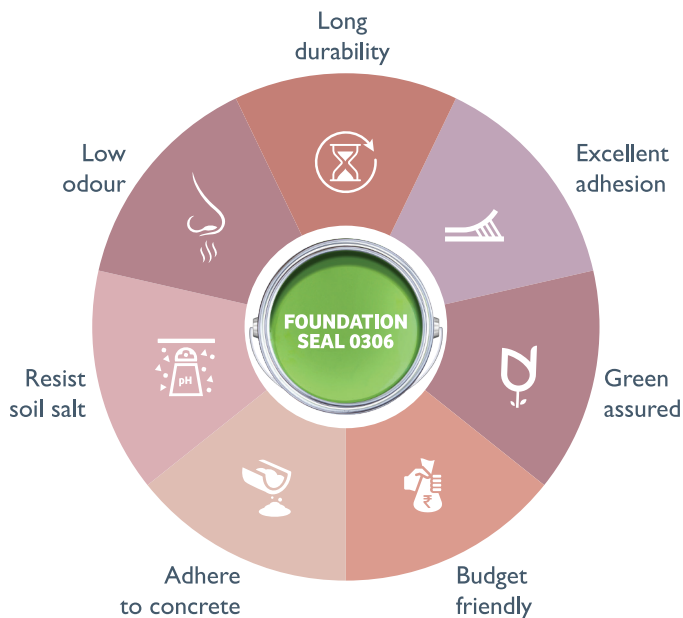

GREEN ADVANTAGES

Low odour

Low VOC

APEO free

Phthalate free

No added Mercury

No added Ammonia

No added Lead

No added Arsenic

No added chromium

No added Cadmium

RECOMMENDED USAGE:

Naturelite care plus foundation seal is recommended for below ground concrete structures, plinth area, and concrete surface prior to cladding.

PHYSICAL PARAMETERS:

Colour	: Black
Finish	: Smooth
Coverage/ spread rate	: @ 125 microns DFT 40.64 Ft ² /Kg

Spreading rate depends on film thickness applied, surface porosity, imperfections, temperature, Wastage during painting etc.



DRYING TIME

Surface dry : 30 minutes

Full dry : 2 hours

Recoat interval : 4-5 hours

The above results according to ASTM D 5895@ 25°C

Stability of thinned paint : use within 24 hours



DRY FILM THICKNESS

Brush: 55-65 microns

SHELF LIFE

36 months from the date of manufacturing, if it is stored under proper conditions and in its original container.

Surface Preparation & Application Details

Surface preparation:

Surface should be cleaned thoroughly of all contaminants like oil, grease, dust, traces of curing compounds etc. All surface imperfections, protrusions, and structurally unsound and friable concrete must be removed and repaired with a suitable repair mortar or PMM.

Application

Primer application:

Stir the container properly before application. Apply self-priming coat of Naturelite Care Plus foundation seal by diluting 20% by volume using brush.

Topcoat application:

After primer application apply first coat of foundation seal without dilution using brush. Apply second coat without dilution in perpendicular direction of first coat, to achieve overall forced coverage of 4 m²/Kg. Allow 4-5 hours of drying time after every coat.

Special Instructions

- Can apply directly on surface.
- Do not apply paint under conditions of frost, dew, rain, frost or adverse weather conditions.
- Coating shall be covered with a polyethylene sheet to protect from on-going construction activities.
- Do not apply below 10°C or above 45°C surface temperature.

PACK SIZES:



5 kg



20 kg

SAFETY PRECAUTIONS:

During application of paint, contact of liquid paint with eyes, skin, inhalation of paint mist and paint vapour, should be strongly avoided. Keep away from reach of children. When working with paint sufficient ventilation, forced ventilation should be provided.

